

Maximum Mark: 75

#### **Cambridge Assessment International Education**

Cambridge International General Certificate of Secondary Education

COMPUTER SCIENCE 0478/13
Paper 1 October/November 2017
MARK SCHEME

**Published** 

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge International will not enter into discussions about these mark schemes.

Cambridge International is publishing the mark schemes for the October/November 2017 series for most Cambridge IGCSE<sup>®</sup>, Cambridge International A and AS Level components and some Cambridge O Level components.

 $\ensuremath{\mathbb{R}}$  IGCSE is a registered trademark.

This syllabus is approved for use in England, Wales and Northern Ireland as a Cambridge International Level 1/Level 2 Certificate.



October/No			
	2	201	7


Answer	Marks
Output	1
1 mark for each correct conversion	3
E 0 4	
1 1 1 0 0 0 0 0 0 0 0	
Any <b>one</b> from:  - Hexadecimal codes can fit in a smaller display rather than a full text based message  - Smaller amount of memory needed to store the hex error messages than text based	1
<ul> <li>1 mark for correct sensor, 1 mark for corresponding use     Possible examples could include: </li> <li>Temperature (sensor) </li> <li>To monitor the temperature of the water</li> <li>Pressure (sensor) </li> <li>To monitor the level of water in the washing machine</li> <li>Motion (sensor) </li> <li>To monitor whether the drum is still in motion</li> <li>pH (sensor) </li> <li>To monitor the level of water hardness/detergent present in the water</li> </ul>	6
	Output  I mark for each correct conversion  E  O  Any one from:  Hexadecimal codes can fit in a smaller display rather than a full text based message Smaller amount of memory needed to store the hex error messages than text based  I mark for correct sensor, 1 mark for corresponding use Possible examples could include:  Temperature (sensor) To monitor the temperature of the water  Pressure (sensor) To monitor the level of water in the washing machine  Motion (sensor) To monitor whether the drum is still in motion  pH (sensor)

© UCLES 2017 Page 2 of 10


		•	ISHED	Colobolini	2017
Question		Ar	nswer		Marks
2	1 mark for each correct file format e.g.				3
		File type	File format		
		Pictures	.JPEG		
		Text	.doc, .txt, .rtf, .docx, .odt .pdf		
		Sound	.mp3, .wav, .aif, .flac, .mid		
		Video	.mp4, .flv, .wmv		

Question	Answer	Marks
3(a)	<ul> <li>Part 1 (access) protocol</li> <li>Part 2 domain (name)</li> <li>Part 3 filename</li> </ul>	3
3(b)	Four from:  - IP address is used to identify a device (on the Internet / network)  - IP address is allocated by the network/ ISP  - Can be used in place of URL  - IP addresses can be IPv4 or IPv6  - IP address can be static  meaning it doesn't change each time it is connected to the Internet  - IP address can be dynamic  meaning that it can change each time a device is connected to the Internet  - Any valid example (e.g. xxx.xxx.xxx.xxx or xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxx	4

© UCLES 2017 Page 3 of 10

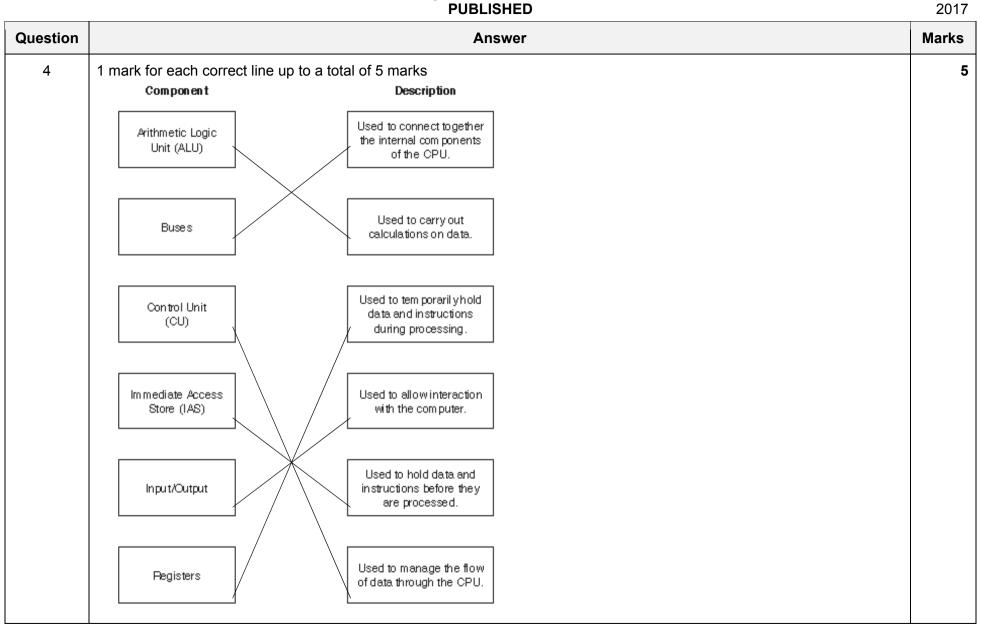

2017

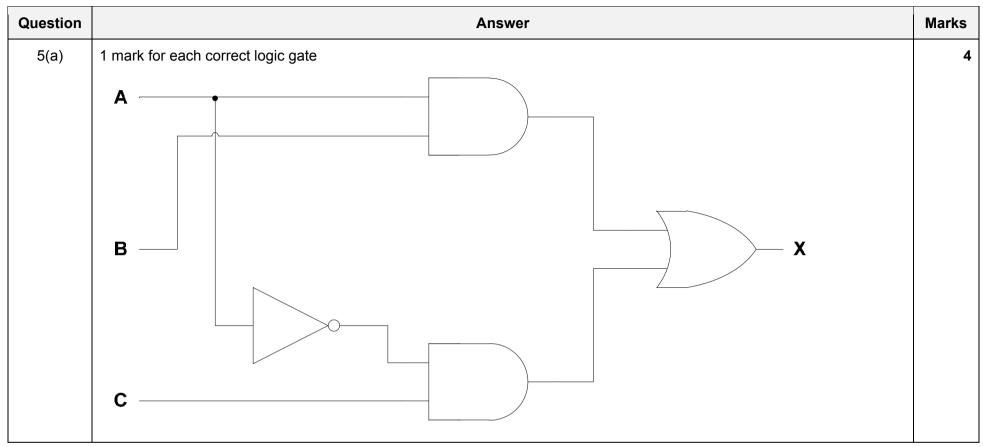

Question	Answer	Marks
5(b)	Any four from:  - similar to an OR gate - It has (at least) two inputs - Output will be high/1 if both inputs are different - Output will be high/1 if either input is high - Output will be low/0 if both inputs are high - Output will be low/0 if both inputs are low	5

Question	Answer	Marks
6	Any six from:	6
	2D - (Scanner) shines a light onto the surface of a document // Light moves across document - Reflected light is captured - Uses mirrors and lenses - Captured image is converted into a digital file - Produces a 2D digital image	
	3D - Scanners shines a laser (or light) over the surface of a 3D object - Records measurements of the geometry/dimensions of the object - Measurements are converted to digital file - Produces a 3D digital model	

© UCLES 2017 Page 6 of 10

************	•	Pα	ро.
October/Nov	/er	nbe	er
	2	201	7

Question	Answer			Marks
7	1 mark for each correct tick			6
	Statement	true (✓)	false (✔)	
	Firewalls can monitor incoming and outgoing traffic.	✓		
	Firewalls operate by checking traffic against a set of rules.	✓		
	Firewalls cannot block access to a certain website.		✓	
	Firewalls can be software and hardware.	✓		
	Firewalls can act as intermediary servers.		✓	
	Firewalls can block unauthorised traffic.	<b>✓</b>		

Question	Answer	Marks
8(a)	Any three from:  - Human error (e.g. deleting/overwriting data)  - Physical damage  - Power failure/surge  - Hardware failure  - Software crashing	3
8(b)	Any three from:  - Online shopping // Online payment systems // Online booking  - Email  - Cloud based storage  - Intranet/extranet  - VPN  - VoIP // video conferencing  - Instant messaging (IM) // social networking // online gaming	3

© UCLES 2017 Page 7 of 10

Question	Answer	Marks
8(c)	1 mark for identifying, 1 mark for description	6
	<ul> <li>Strong password</li> <li>To make it difficult to hack an account</li> </ul>	
	<ul> <li>Biometric device</li> <li>To use data that is difficult to fake as a password</li> </ul>	
	<ul> <li>TLS // Encryption</li> <li>To make data meaningless if intercepted</li> <li>To encrypt data that is exchanged (TLS only)</li> <li>More secure than SSL (TLS only)</li> </ul>	
	<ul> <li>Anti-spyware (software)</li> <li>To find and remove any spyware that is installed on a computer</li> <li>To help stop key loggers recording key presses</li> </ul>	
	<ul> <li>Firewall</li> <li>To help prevent unauthorised access to an account</li> <li>Blocks any requests that do not meet/match the criteria</li> </ul>	
	<ul> <li>Authentication (card reader at home)/mobile security code app/two-step verification</li> <li>To add another level of identification of the user</li> </ul>	
	<ul> <li>Use of drop-down boxes (or equivalent)</li> <li>So key loggers cannot record the key presses</li> </ul>	
	<ul><li>Proxy server</li><li>To divert an attack away from the main system</li></ul>	

© UCLES 2017 Page 8 of 10

2017

# Cambridge IGCSE – Mark Scheme **PUBLISHED**

Question	Answer	Marks
9(a)	Any four from:  - (Red) laser is used  - (Laser beams) shines onto surface of the disk  - It is rotated (at a constant speed) to be read  - Surface is covered in a track (that spirals from the centre)  - Data is represented on the surface using pits and lands  - Pits and lands represent binary values  - Pits reflect light back differently (to the area in between/land)  - Optical device can determine the binary value from the light reflection	4
9(b)	1 mark for calculation, 1 mark for correct answer:  - 1000 × 16 - 16000/8  - Answer is <b>2000</b> bytes	2
9(c)	Four from: (Max 2 for either primary or secondary)  - Primary RAM and ROM - Secondary HDD and SSD  - Primary is directly accessible by CPU - Secondary is not directly accessible by CPU  - Primary is internal to computer - Secondary can be internal or external to the computer  - Primary stores boot up instructions and can hold data whilst being processed - Secondary stores files/software  - Primary has faster access speed - Secondary has a slower access speed - Primary has both volatile and non-volatile - Secondary is non-volatile	4

2017

Question 10	Answer			Marks
	1 mark for each correct tick			6
	Statement	true (✓)	false (✓)	
	Assembly language uses mnemonic codes.	✓		
	Assembly language programs do not need a translator to be executed.		✓	
	Assembly language is a low-level programming language.	✓		
	Assembly language is specific to the computer hardware.	✓		
	Assembly language is machine code.		✓	
	Assembly language is often used to create drivers for hardware.	✓		

© UCLES 2017 Page 10 of 10