



# Cambridge IGCSE™

---

**COMPUTER SCIENCE**

**0478/13**

Paper 1

**October/November 2020**

MARK SCHEME

Maximum Mark: 75

---

**Published**

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge International will not enter into discussions about these mark schemes.

Cambridge International is publishing the mark schemes for the October/November 2020 series for most Cambridge IGCSE™, Cambridge International A and AS Level and Cambridge Pre-U components, and some Cambridge O Level components.

---

This document consists of **13** printed pages.

**PUBLISHED****Generic Marking Principles**

These general marking principles must be applied by all examiners when marking candidate answers. They should be applied alongside the specific content of the mark scheme or generic level descriptors for a question. Each question paper and mark scheme will also comply with these marking principles.

**GENERIC MARKING PRINCIPLE 1:**

Marks must be awarded in line with:

- the specific content of the mark scheme or the generic level descriptors for the question
- the specific skills defined in the mark scheme or in the generic level descriptors for the question
- the standard of response required by a candidate as exemplified by the standardisation scripts.

**GENERIC MARKING PRINCIPLE 2:**

Marks awarded are always **whole marks** (not half marks, or other fractions).

**GENERIC MARKING PRINCIPLE 3:**

Marks must be awarded **positively**:

- marks are awarded for correct/valid answers, as defined in the mark scheme. However, credit is given for valid answers which go beyond the scope of the syllabus and mark scheme, referring to your Team Leader as appropriate
- marks are awarded when candidates clearly demonstrate what they know and can do
- marks are not deducted for errors
- marks are not deducted for omissions
- answers should only be judged on the quality of spelling, punctuation and grammar when these features are specifically assessed by the question as indicated by the mark scheme. The meaning, however, should be unambiguous.

**GENERIC MARKING PRINCIPLE 4:**

Rules must be applied consistently, e.g. in situations where candidates have not followed instructions or in the application of generic level descriptors.

**GENERIC MARKING PRINCIPLE 5:**

Marks should be awarded using the full range of marks defined in the mark scheme for the question (however; the use of the full mark range may be limited according to the quality of the candidate responses seen).

**GENERIC MARKING PRINCIPLE 6:**

Marks awarded are based solely on the requirements as defined in the mark scheme. Marks should not be awarded with grade thresholds or grade descriptors in mind.

Question	Answer	Marks																								
1	<p><b>One</b> mark for each correct row:</p> <table border="1"> <thead> <tr> <th>Device</th> <th>Input (✓)</th> <th>Output (✓)</th> <th>Storage (✓)</th> </tr> </thead> <tbody> <tr> <td>Solid state drive (SSD)</td> <td></td> <td></td> <td>✓</td> </tr> <tr> <td>Headphones</td> <td></td> <td>✓</td> <td></td> </tr> <tr> <td>2D cutter</td> <td></td> <td>✓</td> <td></td> </tr> <tr> <td>LCD projector</td> <td></td> <td>✓</td> <td></td> </tr> <tr> <td>Microphone</td> <td>✓</td> <td></td> <td></td> </tr> </tbody> </table>	Device	Input (✓)	Output (✓)	Storage (✓)	Solid state drive (SSD)			✓	Headphones		✓		2D cutter		✓		LCD projector		✓		Microphone	✓			5
Device	Input (✓)	Output (✓)	Storage (✓)																							
Solid state drive (SSD)			✓																							
Headphones		✓																								
2D cutter		✓																								
LCD projector		✓																								
Microphone	✓																									

Question	Answer	Marks
2(a)	– Control unit // CU	1
2(b)	– Arithmetic logic unit // ALU	1
2(c)	– Program counter // memory address register // PC // MAR	1
2(d)	– Memory data register // current instruction register // MDR // CIR	1
2(e)	– Memory data register // MDR	1

Question	Answer	Marks																				
3(a)	<p><b>One</b> mark per each correct row:</p> <table border="1"> <thead> <tr> <th>Denary</th> <th>Binary Conversion</th> <th>Correct (✓)</th> <th>Incorrect (✓)</th> </tr> </thead> <tbody> <tr> <td>145</td> <td>10010001</td> <td>✓</td> <td></td> </tr> <tr> <td>179</td> <td>10110101</td> <td></td> <td>✓</td> </tr> <tr> <td>11</td> <td>00010011</td> <td></td> <td>✓</td> </tr> <tr> <td>100</td> <td>01100010</td> <td></td> <td>✓</td> </tr> </tbody> </table>	Denary	Binary Conversion	Correct (✓)	Incorrect (✓)	145	10010001	✓		179	10110101		✓	11	00010011		✓	100	01100010		✓	4
Denary	Binary Conversion	Correct (✓)	Incorrect (✓)																			
145	10010001	✓																				
179	10110101		✓																			
11	00010011		✓																			
100	01100010		✓																			
3(b)	<p><b>One</b> mark for each correct conversion in the correct order:</p> <ul style="list-style-type: none"> <li>– C</li> <li>– 4</li> <li>– 0</li> </ul>	3																				

Question	Answer	Marks
4(a)	<p>Any <b>four</b> from:</p> <ul style="list-style-type: none"> <li>– Browsers sends URL to DNS</li> <li>– ... using HTTP</li> <li>– DNS finds matching IP addresses for URL</li> <li>– ... and sends IP address to web browser</li> <li>– Web browser sends request to IP address/web server for web pages</li> <li>– Web pages are sent from web server to browser</li> <li>– Browser renders HTML to display web pages</li> <li>– Any security certificates are exchanged/authenticated // SSL/HTTPS is used to secure the data</li> <li>– ... encrypting any data sent</li> </ul>	4

Question	Answer	Marks
4(b)	<p>Any <b>three</b> from:</p> <ul style="list-style-type: none"> <li>– Hacking</li> <li>– Denial of service (DoS)</li> <li>– Malware</li> <li>– Virus</li> </ul> <p>NOTE: three suitable types of malware can be awarded</p>	<b>3</b>

Question	Answer	Marks
5(a)	<p><b>One</b> mark for correct tick, <b>two</b> marks for description</p> <ul style="list-style-type: none"> <li>– Serial</li> <li>– Bits sent one at a time</li> <li>– Single wire</li> </ul> <p>If parallel given, no mark for parallel, but follow through for correct description of parallel:</p> <ul style="list-style-type: none"> <li>– Multiple bits sent at a time</li> <li>– Multiple wires</li> </ul>	<b>3</b>
5(b)	<p>Any <b>three</b> from:</p> <ul style="list-style-type: none"> <li>– Universal connection // industry standard</li> <li>– Can only be inserted one way</li> <li>– Backward compatible</li> <li>– Auto configures // automatically recognised devices</li> <li>– Can power devices</li> <li>– Fast data transfer speed</li> <li>– Inexpensive to purchase/manufacture</li> </ul>	<b>3</b>

Question	Answer	Marks
5(c)	Any <b>two</b> from: – TLS – SSL – HTTPS	<b>2</b>

Question	Answer	Marks
6	– Key // Algorithm – Algorithm // Key (must be opposite of first one) – Plain – Cypher – Key // Algorithm	<b>5</b>

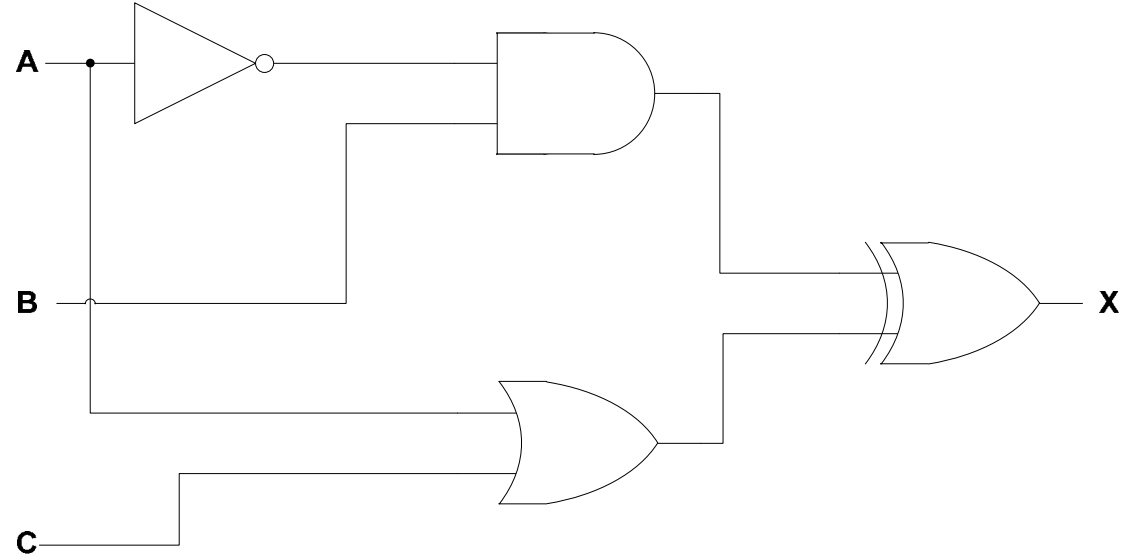
Question	Answer	Marks															
7(a)	<p><b>One</b> mark for each correct row:</p> <table border="1"> <thead> <tr> <th>8-bit binary value</th> <th>Even (✓)</th> <th>Odd (✓)</th> </tr> </thead> <tbody> <tr> <td>10000001</td> <td>✓</td> <td></td> </tr> <tr> <td>10000010</td> <td>✓</td> <td></td> </tr> <tr> <td>00101001</td> <td></td> <td>✓</td> </tr> <tr> <td>00101000</td> <td>✓</td> <td></td> </tr> </tbody> </table>	8-bit binary value	Even (✓)	Odd (✓)	10000001	✓		10000010	✓		00101001		✓	00101000	✓		<b>4</b>
8-bit binary value	Even (✓)	Odd (✓)															
10000001	✓																
10000010	✓																
00101001		✓															
00101000	✓																
7(b)	Any <b>one</b> from: – Transposition error – When bits still add up to odd/even number – <b>Even</b> number of incorrect bits	<b>1</b>															

Question	Answer	Marks
7(c)	Any <b>one</b> from: – ARQ – Checksum	1

Question	Answer	Marks
8(a)	Any <b>three</b> from: – Liquid crystal display – The <b>display</b> is made of pixels – ... arranged in a matrix – Uses a flat panel display – Backlit display – ... with CCFLs/LEDs – Uses light-modulating properties of liquid crystals – Crystals can be turned between opaque and transparent (to allow light to pass) – Colours created using RGB	3
8(b)	Any <b>three</b> from: – Low power consumption – Runs at cool temperature – Do not suffer image burn – Do not suffer flicker issues – Bright image/colours – High resolution image – Cheaper to purchase than e.g. LED screen	3



Question	Answer	Marks
9(a)	Any <b>three</b> from: <ul style="list-style-type: none"><li>– Both need a <b>red</b> laser to read/write data</li><li>– Both are spun to be read</li><li>– Both use spiral tracks for data</li><li>– Both are optical storage</li><li>– Both are off-line storage // both non-volatile</li><li>– Both use pits and lands to store data</li></ul>	<b>3</b>
9(b)	Any <b>one</b> from: <ul style="list-style-type: none"><li>– DVD can be dual layer, but CD can only be single</li><li>– DVD has higher storage capacity</li><li>– DVD has a shorter wavelength laser</li><li>– DVD are spun faster</li><li>– DVDs have a higher data transfer rate</li></ul>	<b>1</b>

Question	Answer	Marks
10(a)	<p><b>One</b> mark for each correct logic gate with the correct input:</p>  <p>The diagram shows a logic circuit with three inputs: A, B, and C, and one output: X. Input A is connected to an inverter and the top input of an AND gate. Input B is connected to the bottom input of the AND gate and the top input of an OR gate. Input C is connected to the bottom input of the OR gate. The output of the inverter is connected to the top input of the AND gate. The output of the AND gate is connected to the top input of a second OR gate. The output of the OR gate (with inputs B and C) is connected to the bottom input of the second OR gate. The output of the second OR gate is labeled X.</p>	4

Question	Answer	Marks																																													
10(b)	<p>Four marks for 8 correct outputs            Three marks for 6/7 correct outputs            Two marks for 4/5 correct outputs            One mark for 2/3 correct outputs</p> <table border="1" data-bbox="338 384 1317 1007"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>Working space</th> <th>X</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td></td><td>0</td></tr> <tr><td>0</td><td>0</td><td>1</td><td></td><td>1</td></tr> <tr><td>0</td><td>1</td><td>0</td><td></td><td>1</td></tr> <tr><td>0</td><td>1</td><td>1</td><td></td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td></td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td></td><td>1</td></tr> <tr><td>1</td><td>1</td><td>0</td><td></td><td>1</td></tr> <tr><td>1</td><td>1</td><td>1</td><td></td><td>1</td></tr> </tbody> </table>	A	B	C	Working space	X	0	0	0		0	0	0	1		1	0	1	0		1	0	1	1		0	1	0	0		1	1	0	1		1	1	1	0		1	1	1	1		1	4
A	B	C	Working space	X																																											
0	0	0		0																																											
0	0	1		1																																											
0	1	0		1																																											
0	1	1		0																																											
1	0	0		1																																											
1	0	1		1																																											
1	1	0		1																																											
1	1	1		1																																											
11	<p>Six from:</p> <ul style="list-style-type: none"> <li>– Suitable sensor used e.g. motion sensor/pressure sensor</li> <li>– (Analogue) data is converted to digital (using ADC)</li> <li>– Sensor sends data to microprocessor</li> <li>– Data compared to stored data ...</li> <li>– ... if value outside range/within range water is sprayed</li> <li>– ... signal sent to actuator to spray water</li> <li>– ... if value within range/outside range no action taken</li> <li>– Continuous loop</li> </ul>	6																																													

Question	Answer	Marks																		
12	<p><b>One</b> mark for each correct row:</p> <table border="1" data-bbox="338 284 1496 708"> <thead> <tr> <th data-bbox="338 284 1211 379">Statement</th> <th data-bbox="1211 284 1355 379">True (✓)</th> <th data-bbox="1355 284 1496 379">False (✓)</th> </tr> </thead> <tbody> <tr> <td data-bbox="338 379 1211 448">Provides access to the Internet for customers</td> <td data-bbox="1211 379 1355 448">✓</td> <td data-bbox="1355 379 1496 448"></td> </tr> <tr> <td data-bbox="338 448 1211 517">Can determine the maximum bandwidth available for customers</td> <td data-bbox="1211 448 1355 517">✓</td> <td data-bbox="1355 448 1496 517"></td> </tr> <tr> <td data-bbox="338 517 1211 585">Monitors the volume of data downloaded by customers</td> <td data-bbox="1211 517 1355 585">✓</td> <td data-bbox="1355 517 1496 585"></td> </tr> <tr> <td data-bbox="338 585 1211 654">Can provide an IP address for the customer</td> <td data-bbox="1211 585 1355 654">✓</td> <td data-bbox="1355 585 1496 654"></td> </tr> <tr> <td data-bbox="338 654 1211 708">Stores the content for all web pages available on the Internet</td> <td data-bbox="1211 654 1355 708"></td> <td data-bbox="1355 654 1496 708">✓</td> </tr> </tbody> </table>	Statement	True (✓)	False (✓)	Provides access to the Internet for customers	✓		Can determine the maximum bandwidth available for customers	✓		Monitors the volume of data downloaded by customers	✓		Can provide an IP address for the customer	✓		Stores the content for all web pages available on the Internet		✓	5
Statement	True (✓)	False (✓)																		
Provides access to the Internet for customers	✓																			
Can determine the maximum bandwidth available for customers	✓																			
Monitors the volume of data downloaded by customers	✓																			
Can provide an IP address for the customer	✓																			
Stores the content for all web pages available on the Internet		✓																		

Question	Answer	Marks
13(a)	Any <b>one</b> from: – Both are designed to steal/collect personal data – Both pretend to be a real company – Both use fake websites	<b>1</b>
13(b)	– Phishing involves use of an email whereas pharming involves installing malicious code – Phishing involves clicking a link or an attachment whereas pharming creates a redirection	<b>2</b>